


Dark Horse R – Rain Tires

Axle	Specification	Sebring	Barber	COTA	VIR	Road America	Road Atlanta
Front	Max Camber	-3.6°	-3.6°	-3.6°	-3.6°	-3.6°	-3.6°
	Min Cold Pressure	26 psi	26 psi	26 psi	26 psi	26 psi	26 psi
Rear	Max Camber	-2.6°	-2.6°	-2.6°	-2.6°	-2.6°	-2.6°
	Min Cold Pressure	25 psi	25 psi	25 psi	25 psi	25 psi	25 psi

Required Arrow Direction for Tire Mounting

Slick tires must be mounted on the car with directional arrows pointing toward the center of the vehicle. This ensures the tire rolls across its tread splice under hard acceleration and heavy braking. Rain tires must be mounted with directional arrows pointing to the front of the car.

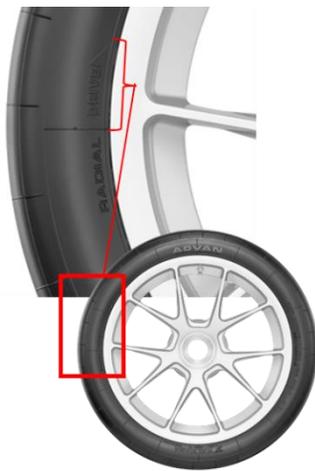

Sincerely,

Tricia Wall

Tricia Wall
 Motorsports Senior Manager
 Yokohama Tire Corporation
 patricia.wall@yokohamatire.com